





MEC/KMEC  
IP/LP Drum End Enclosure- Base Channel Layout

VOGT POWER INTERNATIONAL


Released, Work May Proceed

Bell, Milton

Aug-20-2016

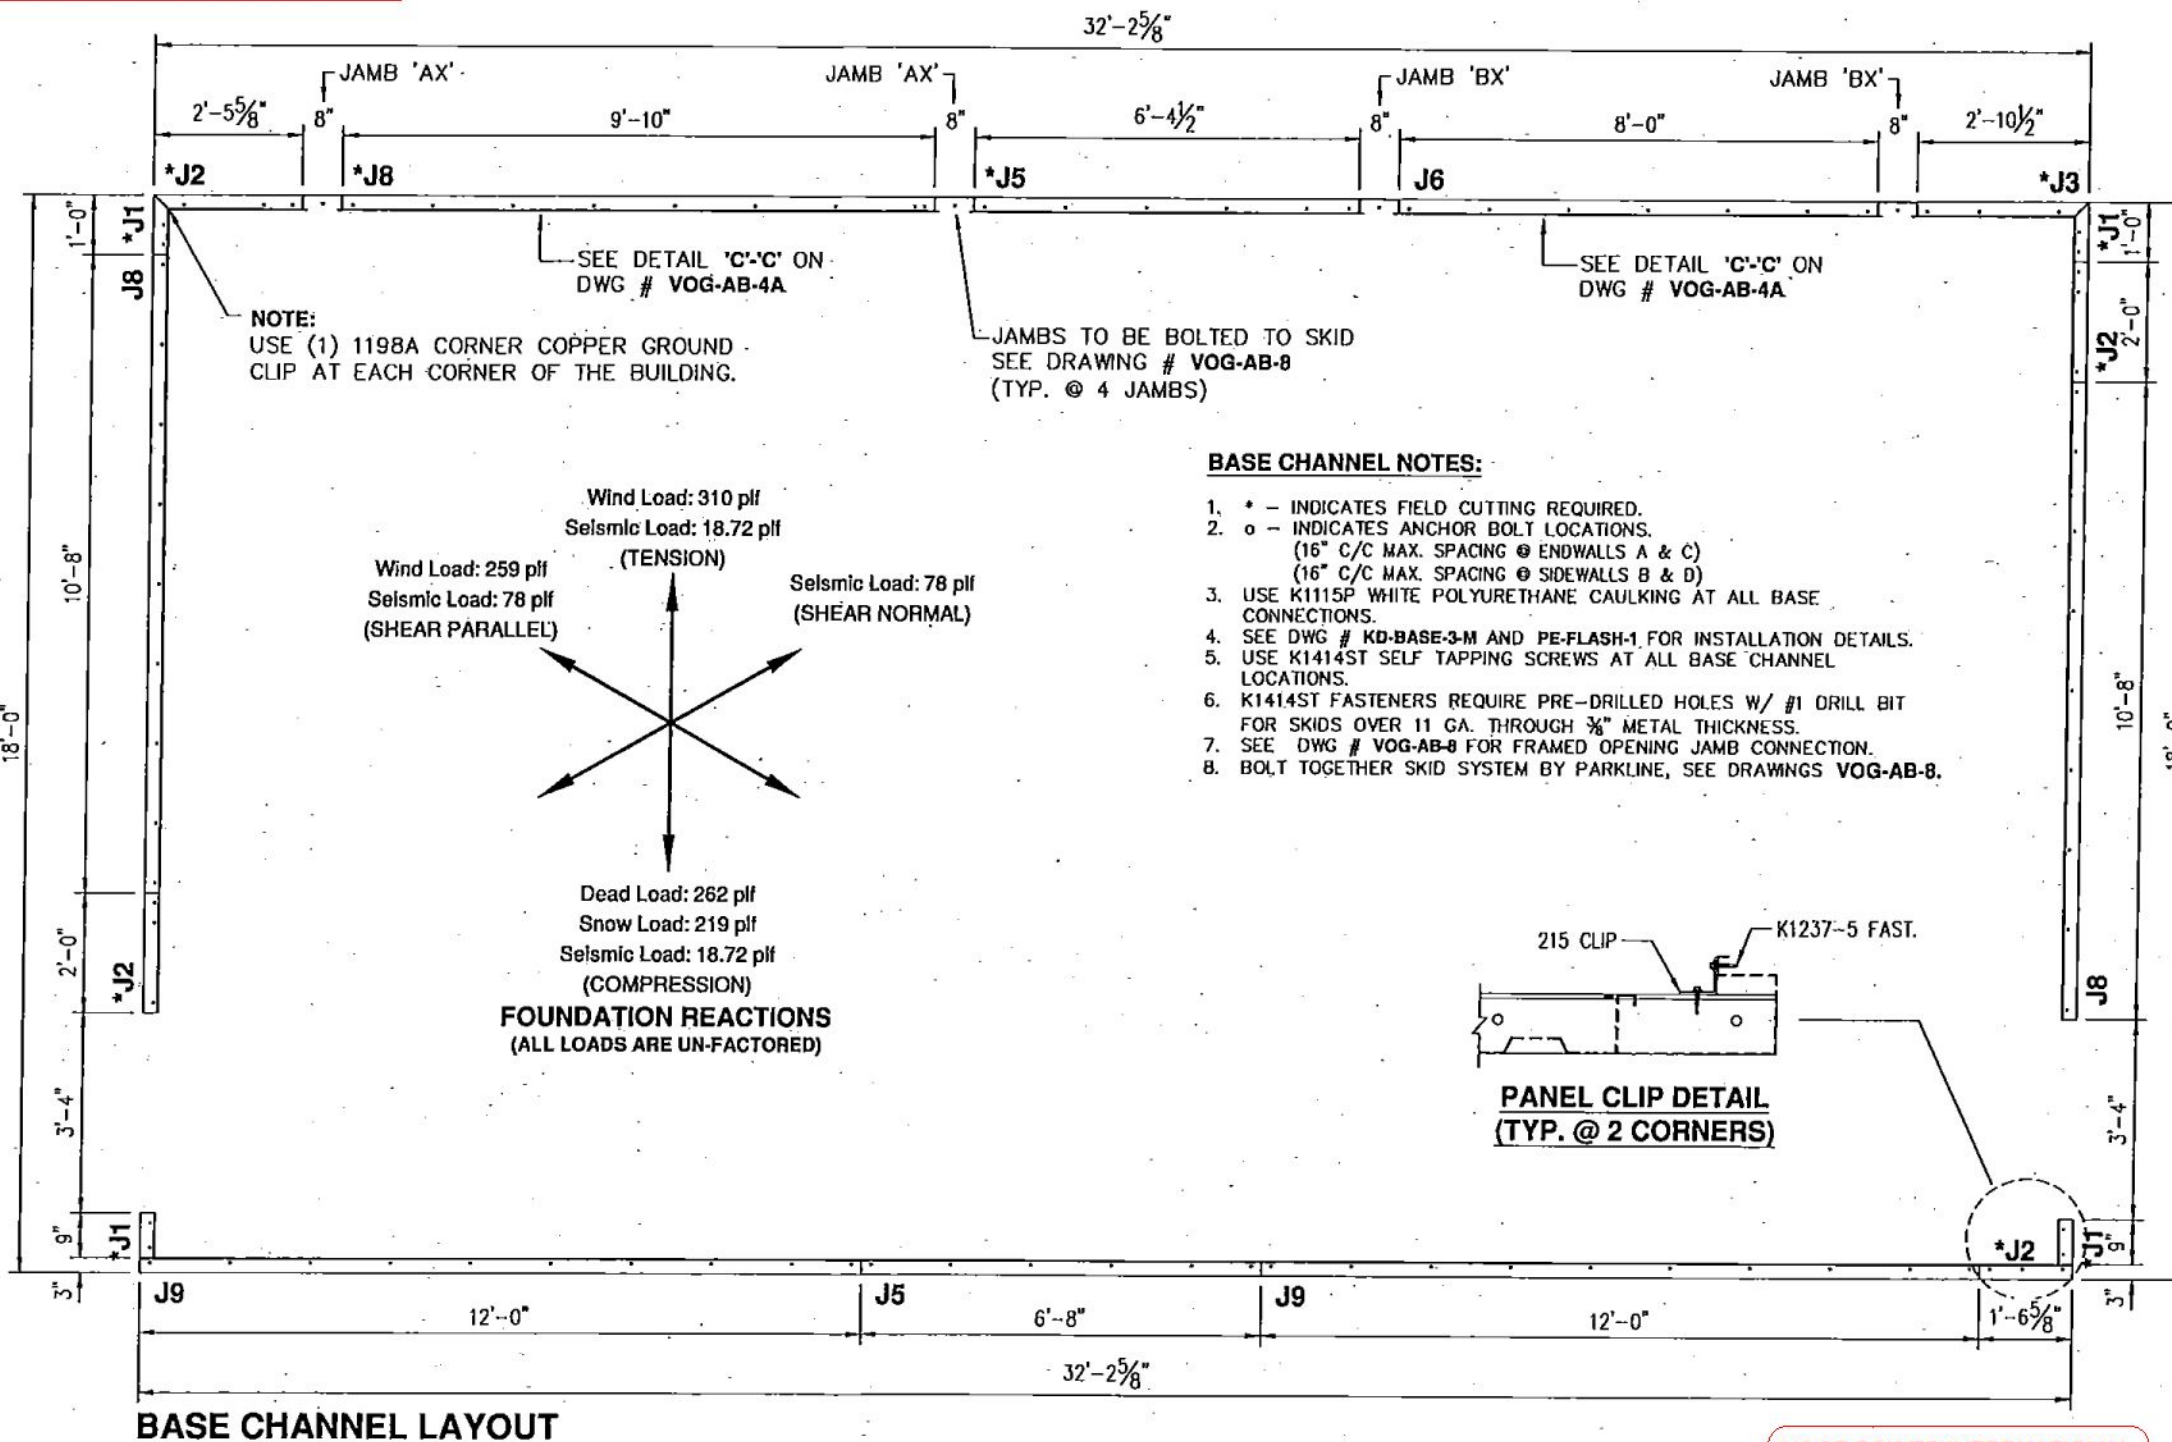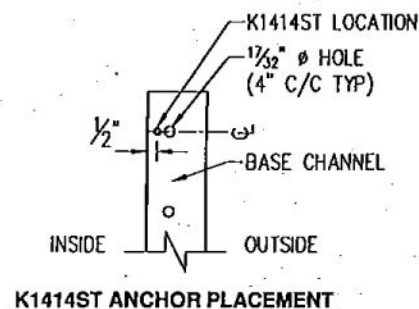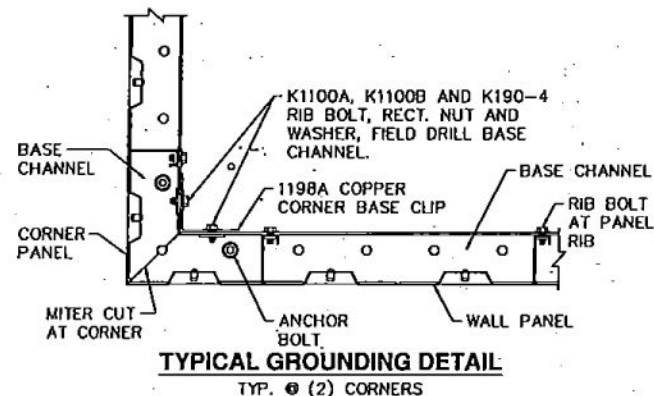
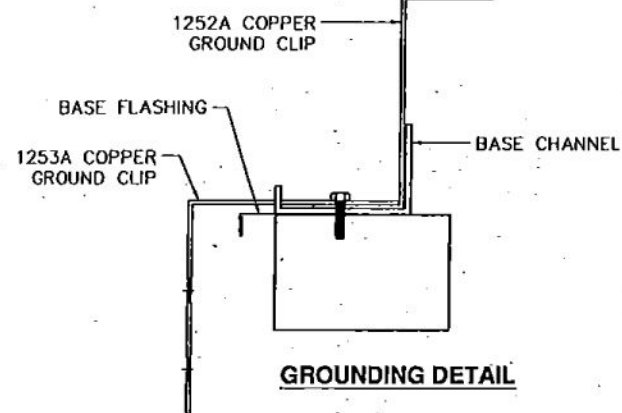


NOTE:  
USE (1) 1198A CORNER COPPER GROUND CLIP AT EACH CORNER OF THE BUILDING.

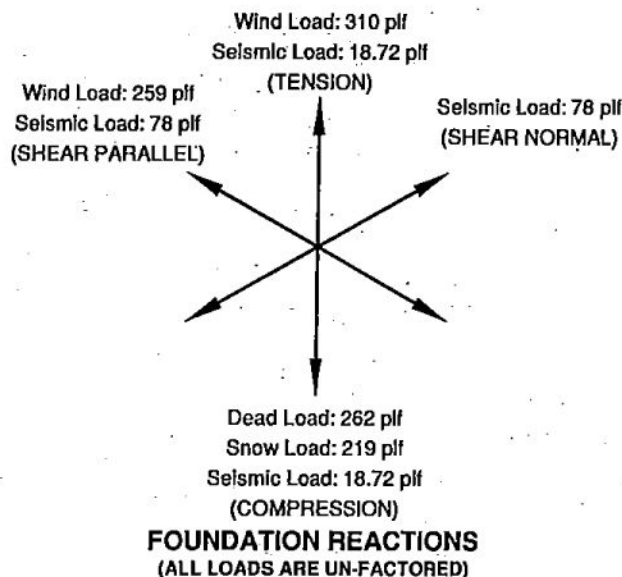

**BASE CHANNEL NOTES:**

- \* - INDICATES FIELD CUTTING REQUIRED.
- o - INDICATES ANCHOR BOLT LOCATIONS.  
(16" C/C MAX. SPACING @ ENDWALLS A & C)  
(16" C/C MAX. SPACING @ SIDEWALLS B & D)
- USE K1115P WHITE POLYURETHANE CAULKING AT ALL BASE CONNECTIONS.
- SEE DWG # KD-BASE-3-M AND PE-FLASH-1 FOR INSTALLATION DETAILS.
- USE K1414ST SELF TAPPING SCREWS AT ALL BASE CHANNEL LOCATIONS.
- K1414ST FASTENERS REQUIRE PRE-DRILLED HOLES W/ #1 DRILL BIT FOR SKIDS OVER 11 GA. THROUGH 3/8" METAL THICKNESS.
- SEE DWG # VOG-AB-8 FOR FRAMED OPENING JAMB CONNECTION.
- BOLT TOGETHER SKID SYSTEM BY PARKLINE, SEE DRAWINGS VOG-AB-8.

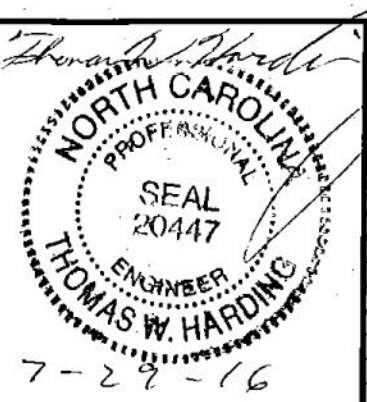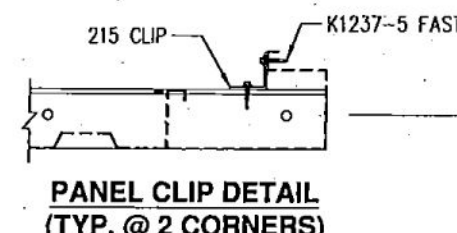

REVISIONS	BY	DATE
03-30-16	JCC	
05-09-16	JCC	
07-25-16	DJM	

**BUILDING FINISH**

WALL COLOR: ARCTIC WHITE  
WALL PANEL THICKNESS: .028  
TRIM COLOR: ARCTIC WHITE  
ROOF COLOR: GALVALUME  
ROOF PANEL THICKNESS: .042  
ROOF RIB HEIGHT: 3"



**PARKLINE, INC.**  
RT. 62, ELEANOR INDUSTRIAL PARK  
ELEANOR, WV 25070  
EMAIL: PARKLINE@PARKLINE.COM  
PHONE: 800-786-4855 FAX: 304-586-3842

**VOGT POWER INTERNATIONAL, INC.**  
LOUISVILLE, KY

JOB NO. V17494 - MIDDLETOWN ENERGY - DESTINATION: MIDDLETOWN, OH  
JOB NO. V17495 - KINGS MT. ENERGY - DESTINATION: KINGS MT., NC  
VPI P.O. # V0009691  
IP/LP DRUM ENCLOSURE

VOGT POWER INTERNATIONAL  
V17494-BEXD-5013-05  
08-Aug-2016

**BASE CHANNEL LAYOUT**

**VOG-AB-3**

DATE: 3/30/2016	ORDER #:	VOG-AB	REVISION #:	3
DRAWN BY: JCC				
SCALE: NTS				