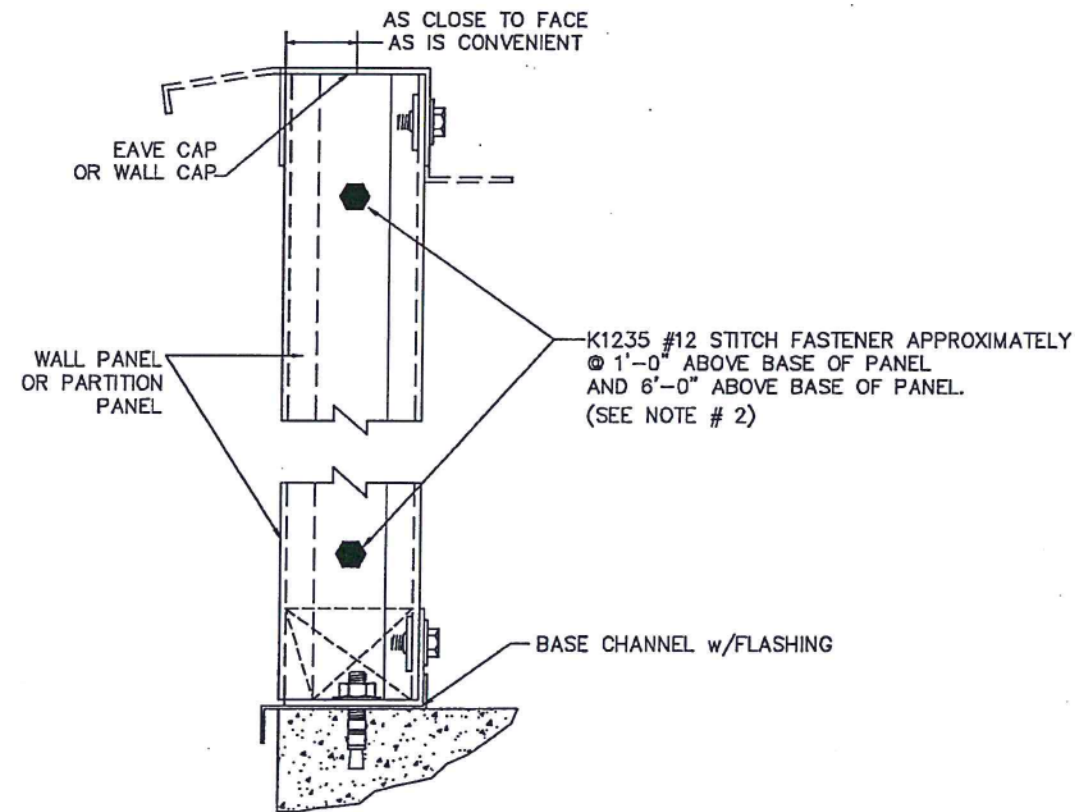


MEC/KMEC
Drum End Enclosure-Panel Closure And Stitch Screw Details

**NOTE #1:**

K1235 STITCH FASTENERS ARE INSTALLED IN ALL WALL AND PARTITION PANELS. DO NOT INSTALL UNTIL BUILDING IS SQUARE AND PLUMB.

NOTE #2:

ON BUILDINGS WITH AN EAVE HEIGHT OF MORE THAN 14'-0" IT IS NECESSARY TO INSTALL (1) ADDITIONAL STITCH FASTENER APPROXIMATELY AT, 12'-0" ABOVE BASE.

Donald W. Hardy
MAY 09 2012

REVISIONS	BY
05-10-05	RAP
11-07-05	CBP
11-06-06	BHKJ
4-9-08	BAS

PARKLINE, INC.
P O Box 65 Winfield, WV 25213
phone: (304) 586-2113

JOB DESCRIPTION
STITCH FASTENER AND
PANEL CLOSURE INSTALLATION
FOR ALL BUILDINGS
SHEET TITLE
DETAILS

DATE 03-07-05

DRAWN BY RAP

SCALE NTS

ORDER NO.

REVISION 4

DWG. NO.

WALL-1

NOTE:


K2017 PANEL CLOSURES ARE INSTALLED AT THE BOTTOM OF ALL FLUTED EXTERIOR WALL PANELS AND TOP AND BOTTOM OF ALL FLUSH EXTERIOR WALL PANELS AND FLUSH INTERIOR PARTITION PANELS. PANEL CLOSURES ARE TO BE INSTALLED AFTER BUILDING HAS BEEN SQUARED AND PLUMBED. PANEL CLOSURES ARE ALSO INSTALLED AT TOP AND BOTTOM OF ALL WALL OPENINGS.

NOTE:

(PERTAINING TO MINI-WAREHOUSE BUILDINGS ONLY)

PANEL CLOSURES ARE USED ONLY ON EXTERIOR FLUTED WALL PANELS. PANEL CLOSURES ARE NOT INSTALLED ON INTERIOR FLUSH PARTITION PANELS.

VOGT POWER INTERNATIONAL
V17494-BEXD-5055-02
06-Aug-2016

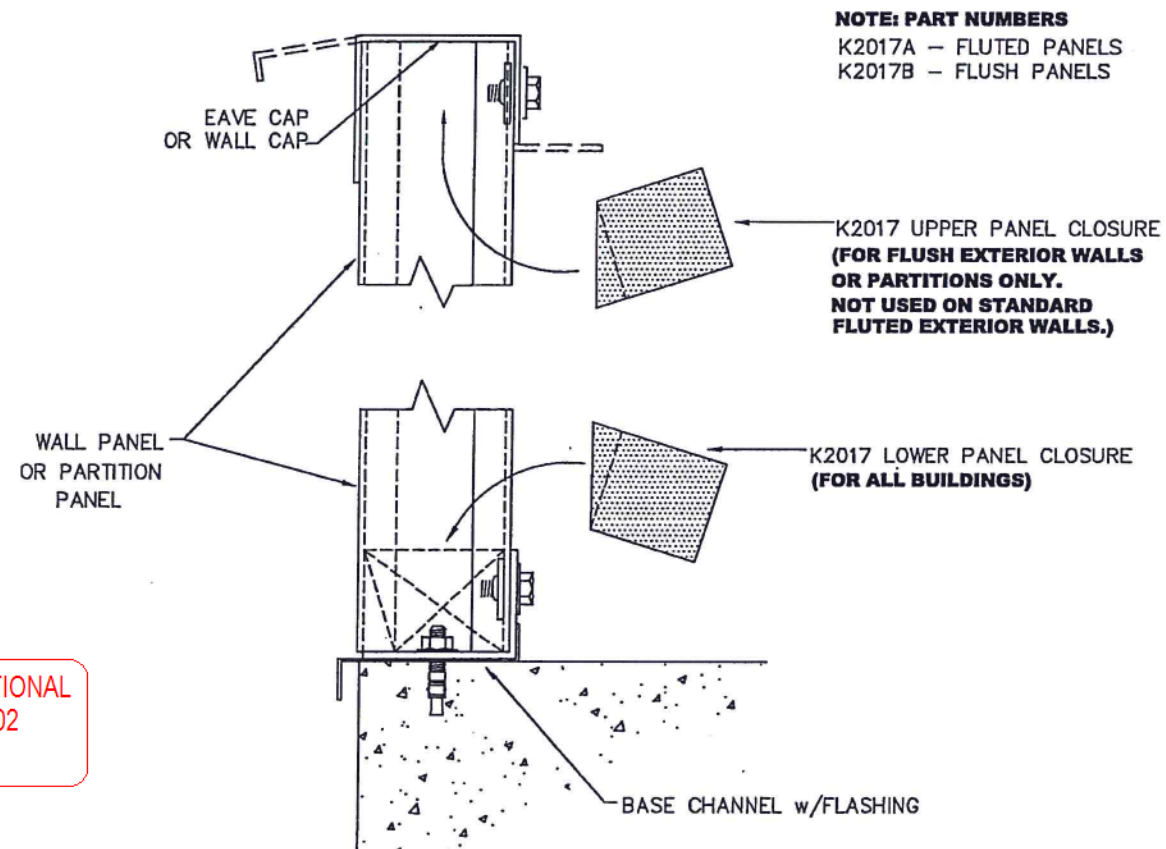**NOTE: PART NUMBERS**

K2017A - FLUTED PANELS
K2017B - FLUSH PANELS