



OUTSIDE ELEVATION

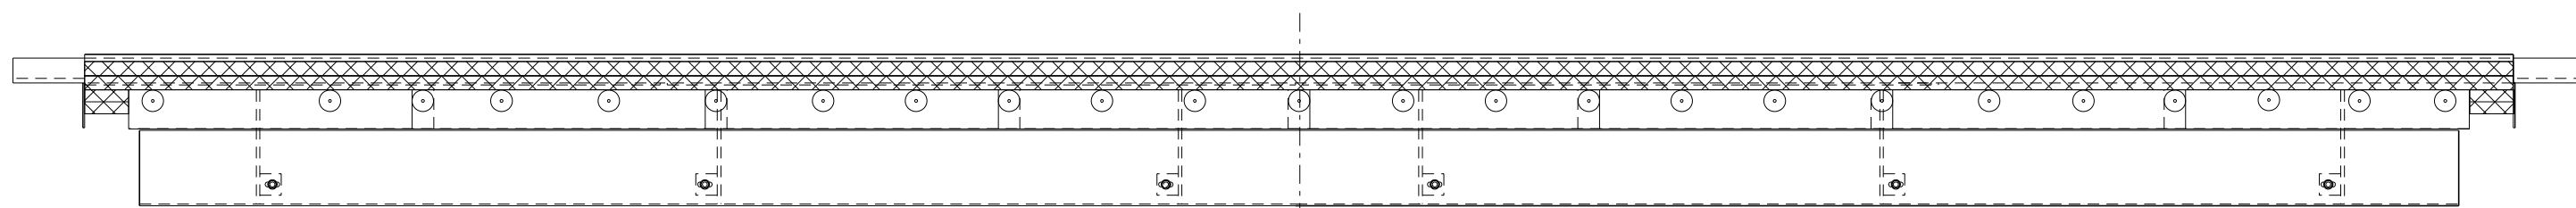

BOTTOM VIEW

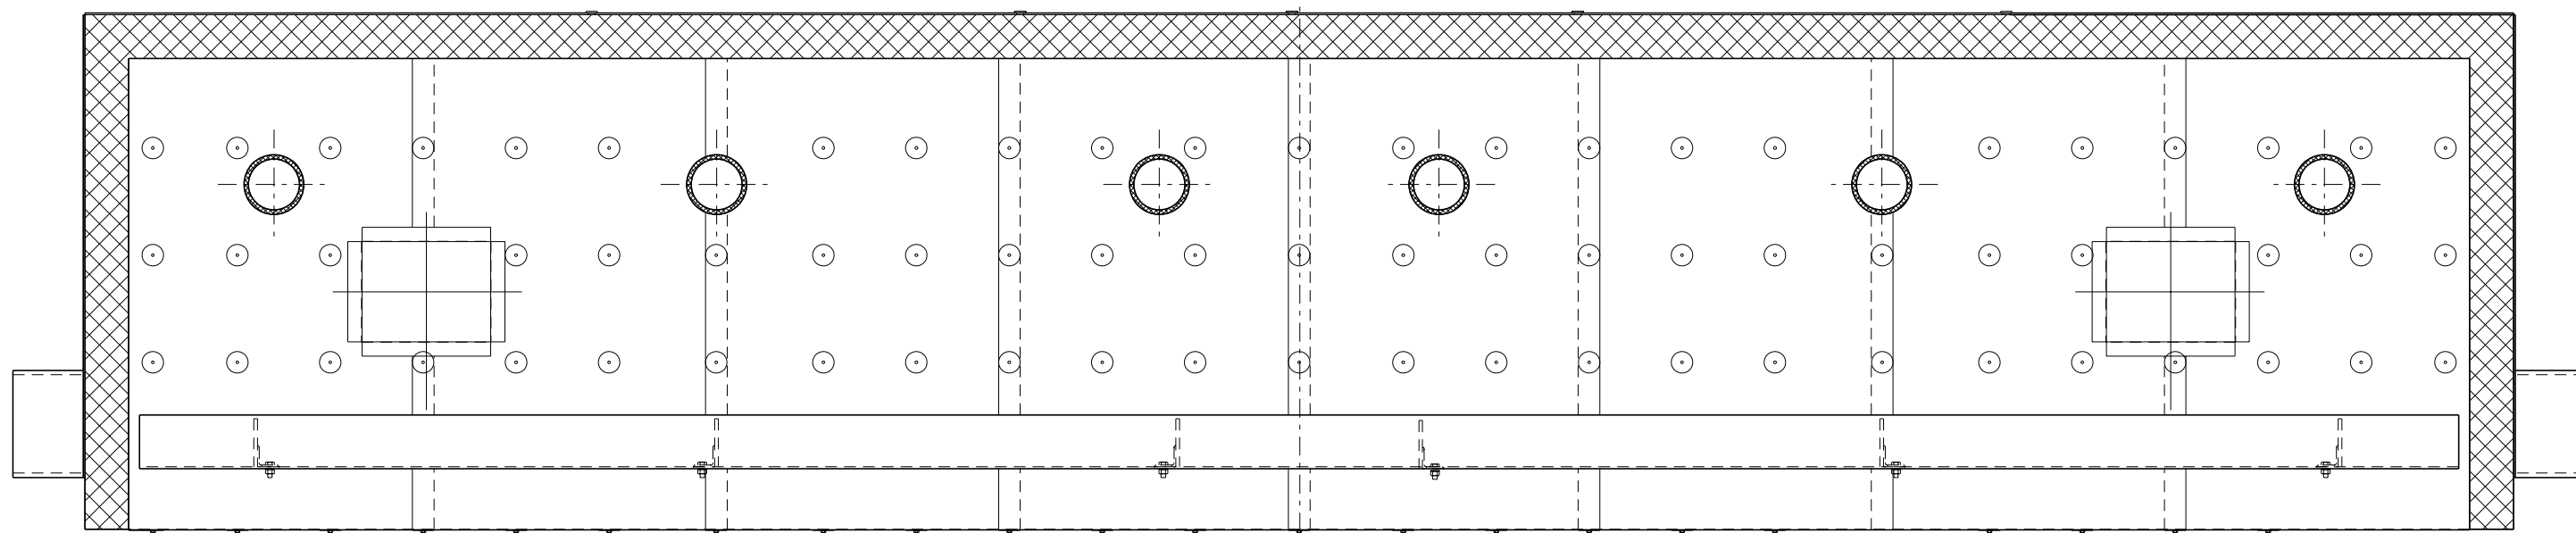

VIEW  
INSIDE EL. A

- 1

OVERALL HEIGHT TO BE  $\pm \frac{1}{8}''$  ( $\pm 3.2\text{mm}$ )
- 2

OVERALL LENGTH TO BE  $\pm \frac{1}{8}''$  ( $\pm 3.2\text{mm}$ )
- 3

LOCATION OF PENETRATIONS TO BE  $\pm \frac{1}{8}''$  ( $\pm 3.2\text{mm}$ )
- 4

LOCATION OF STRUCTURAL MEMBERS (CENTER OR EDGE) TO BE  $\pm \frac{1}{8}''$  ( $\pm 3.2\text{mm}$ )
- 5

LOCATION OF CASING PLATE TO BE  $\pm \frac{1}{8}''$  ( $\pm 3.2\text{mm}$ )
- 6

LOCATION OF HOLES TO BE  $\pm \frac{1}{16}''$  ( $\pm 1.6\text{mm}$ )
- 7

CENTER TO CENTER OF HOLES TO BE  $\pm \frac{1}{16}''$  ( $\pm 1.6\text{mm}$ )
- 8

OVERALL WIDTH TO BE  $\pm \frac{1}{8}''$  ( $\pm 3.2\text{mm}$ )

APPLIES TO:  
V17494 MIDDLETOWN PROJECT  
V17495 KINGS MOUNTAIN PROJECT

REFERENCE LINE

SIDE ELEVATION

NOTES:

- UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS LISTED BELOW.
- TOLERANCES ARE FOR FINISHED WELDED PRODUCT WHICH MAY NOT BE APPLICABLE FOR FIT-UP TOLERANCES PRIOR TO WELDING.

00	FIRST ISSUE	22-SEP-15	SP	REEVES		FRY
Rev.	Description	Date	Drawn	Chkd. 1	Chkd. 2	Appr.
Revisions						
This drawing contains Vogt Power International's confidential and proprietary information and cannot be used, duplicated or disclosed in whole or in part, except with the express written permission of Vogt Power International. EXCEPT AS EXPRESSLY STATED IN ANY WRITTEN CONTRACT - ALL WARRANTIES RELATING TO THIS DRAWING, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS, ARE DISCLAIMED. © Vogt Power International, Inc. all rights reserved as an unpublished work.						
MIDDLETOWN ENERGY CENTER and KINGS MOUNTAIN ENERGY CENTER for NTE ENERGY and GEMMA POWER SYSTEMS VOGT POWER PROJECTS V17494 & V17495						3rd ANGLE PROJECTION 
Title						Scale: NONE
STANDARD FABRICATION TOLERANCES FOR ATTIC & BASEMENT PANEL ASSEMBLY						
13551 Triton Park Blvd Suite 2000 Louisville, Ky. 40223 USA WWW.VogtPower.com						
Internal Drawing Status FOR RECORD		Size C	Drawing No. V17494-EBND-0102		Rev. 00	