

MEC/KMEC  
IP/LP Drum End Enclosure- Lifting & Offloading

VOGT POWER INTERNATIONAL

Released, Work May Proceed


Bell, Milton

Aug-20-2016


**NOTE:**

BUILDING SHOWN IS FOR REPRESENTATION ONLY. SEE YOUR ELEVATION DRAWING FOR ACTUAL BUILDING LAYOUT.

**SITE WORK REQUIRED**

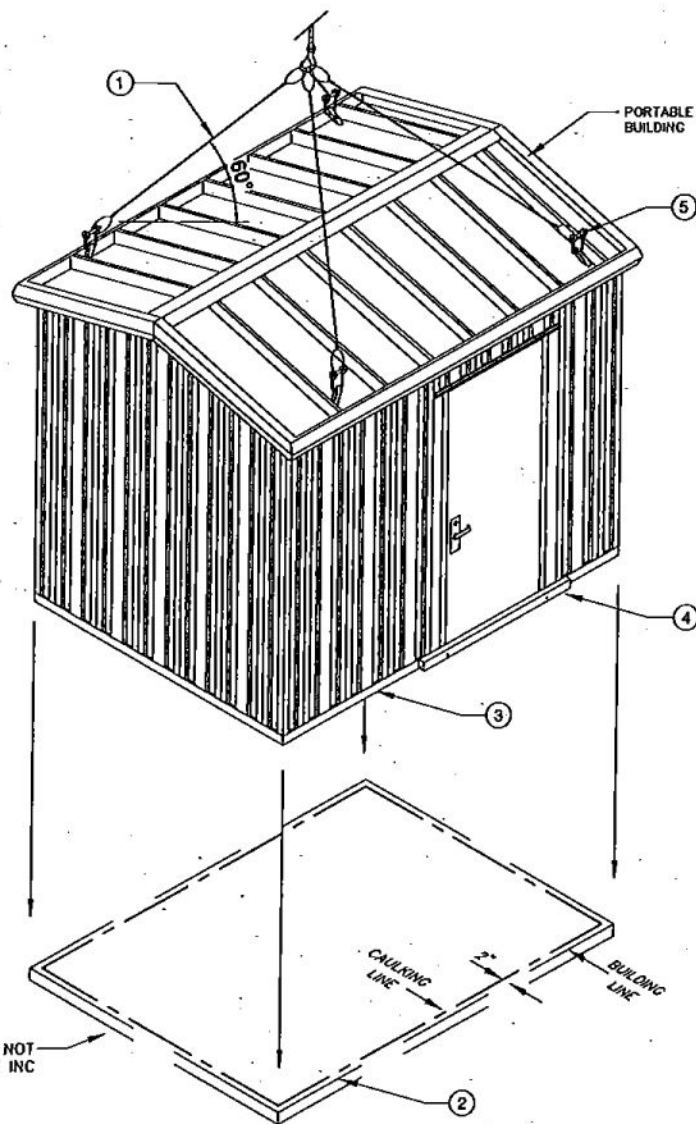

PRE-ERECTED BUILDING OFFLOADING

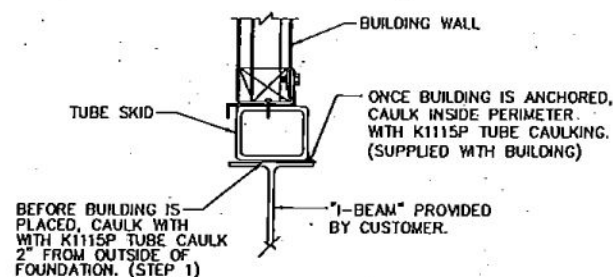


CAULKING DETAIL (STEP 2.)

1. - RIGGING BY OTHERS.
2. - BEFORE SETTING BUILDING ON FOUNDATION, APPLY A 1/4" BEAD OF K1115P TUBE CAULKING AROUND PERIMETER AS SHOWN (0'-2" FROM EDGE OF FOUNDATION)
3. - ANCHOR BUILDING TO FOUNDATION BY WELDING TO CUSTOMERS "I-BEAM".
4. - REMOVE TEMPORARY TUBE DOOR BRACE (OUTSIDE BUILDING) AND DISCARD. INSTALL PLUG HOLES W/ PLASTIC CAPS PROVIDED.
5. - REMOVE HOIST RINGS FROM ROOF AND REPLACE W/ BOLT, FLAT WASHER AND RUBBER WASHER.

BUILDING WT. \_\_\_\_\_ #

## 20K LIFT


AFTER BUILDING IS SET AND ANCHORED, REMOVE HOIST RINGS (A 3/8" ALLEN WRENCH IS REQUIRED FOR REMOVAL)

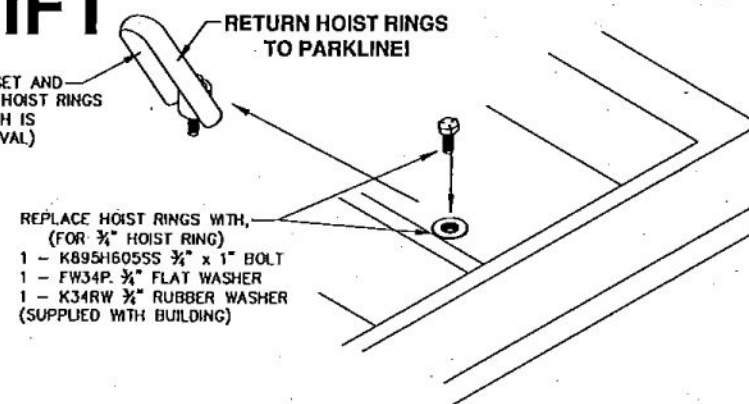

HOIST RING DETAIL (STEP 5.)

**NOTE:**

15# COLLATERAL LOAD NOT CALCULATED IN BUILDING LIFTING WEIGHT. WIRING, CABLE TRAY AND EQUIPMENT MUST BE INSTALLED AFTER LIFTING.

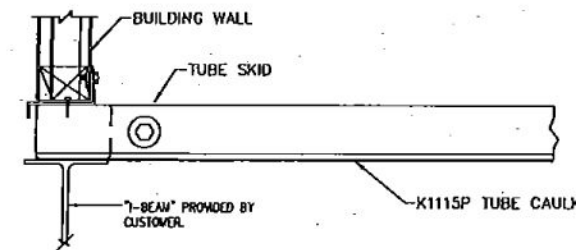

WELDING DETAIL (STEP 3.)

## CRANE OPERATOR NOTE:

DO NOT LIFT IF BUILDING WEIGHT EXCEEDS: 17,320 #

VOGT POWER INTERNATIONAL  
V17494-BEXD-5017-05  
08-Aug-2016



REVISIONS	BY
05-09-16	JCC

**BUILDING FINISH**

WALL COLOR: ARCTIC WHITE  
WALL PANEL THICKNESS: .028  
TRIM COLOR: ARCTIC WHITE  
ROOF COLOR: GALVALUME  
ROOF PANEL THICKNESS: .042  
ROOF RIB HEIGHT: 3"



**PARKLINE, INC.**

RT. 62, ELEANOR INDUSTRIAL PARK  
ELEANOR, WV 25070  
EMAIL: PARKLINE@PARKLINE.COM  
PHONE: 800-786-4855 FAX: 304-586-3842

PARKLINE, INC. CLAIMS PROPRIETARY RIGHTS TO THE INFORMATION, DESIGN, AND LAYOUT DISCLOSED HEREIN. THIS DRAWING IS ISSUED FOR INFORMATIONAL PURPOSES ONLY AND MAY NOT BE REPRODUCED, DISCLOSED TO OTHERS OR USED TO DESIGN OR CONSTRUCT ANY OF THE ITEMS SHOWN HEREIN WITHOUT THE EXPRESSED WRITTEN CONSENT OF PARKLINE, INC.

**VOGT POWER INTERNATIONAL, INC.**  
LOUISVILLE, KY

JOB NO. V17494 - MIDDLETOWN ENERGY - DESTINATION : MIDDLETOWN, OH  
JOB NO. V17495 - KINGS MT. ENERGY - DESTINATION : KINGS MT., NC  
VPI PO#: V0009691  
IP/LP DRUM ENCLOSURE

**LIFTING AND OFFLOADING**

DATE: 3/30/2016  
DRAWN BY: JCC  
SCALE: NTS

VOG-AB-7

ORDER #: VOG-AB REVISION #: 1